

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)


PCT

(10) International Publication Number
WO 2004/002774 A1

- (51) International Patent Classification⁷: B60N 2/42, 2/427 (74) Agent: UNITECTRA; Möhrlistrasse 23, CH-8006 Zürich (CH).
- (21) International Application Number: PCT/EP2003/006615
- (22) International Filing Date: 24 June 2003 (24.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 02405537.8 26 June 2002 (26.06.2002) EP
- (71) Applicants (for all designated States except US): UNIVERSITY OF ZÜRICH [CH/CH]; Office Vice President of Research, Rämistrasse 71, CH-8006 Zürich (CH). ETH Zürich ETH TRANSFER [CH/CH]; Raemistrasse 101, CH-8092 Zürich (CH).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MUSER, Markus [CH/CH]; Seestrasse 79, CH-8820 Wädenswil (CH). SCHMITT, Kai-Uwe [DE/CH]; Bucheggstrasse 160, CH-8057 Zürich (CH).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: SEAT COMPONENT TO PREVENT WHIPLASH INJURY

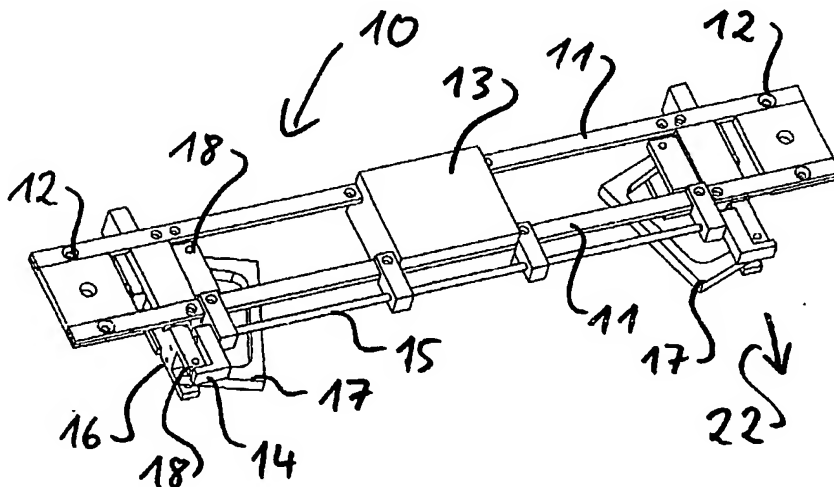

(57) Abstract: A seat component to prevent whiplash injury during a rapid motion change of a vehicle comprises means allowing a displacement of the seat and a person sitting thereon backwards (22) in relation to the direction of movement at the motion change. These means comprise a body (11, 18) to be affixed to or being part of the seat, a slide element (16) affixed to the vehicle and being in guiding contact with said body to guide a translational displacement of the seat over a predetermined distance. It further comprises a trigger system (13) to detect an acceleration threshold, a release mechanism (14) controlled through the trigger system (13) to enable said translational displacement (22) and a damping component (17) to damp said translational displacement (22). The trigger system (13) opens the release mechanism (14) only upon detection of an acceleration value above a predetermined threshold. The NIC experienced when using a conventional seat can be reduced by 40% if said seat is equipped with the device according to the invention.

W 2004/002774 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Seat component to prevent whiplash injury

This invention relates to a seat component to prevent whiplash injury and especially a damping seat component.

Technical Background

Soft tissue neck injuries sustained in low speed collisions are of continued concern in road traffic. Such injuries - often also called "whiplash injuries" - are particularly observed in rear-end collisions, i.e. if, for example, a car is struck from behind and thus subjected to a forward acceleration. At present, the exact injury mechanisms that cause such injury are still unknown. A number of hypotheses on the nature and location of the injury have been proposed by various researchers. To date, it is widely agreed that a relative motion between the head and the neck, the so-called S-shape deformation, is related to the injurious event. Therefore, to prevent such a deformation, the relative acceleration of the occupants head and torso has to be minimized.

Correspondingly, a number of injury criteria have been evaluated that would allow to predict injuries in low speed impacts. Different approaches developing head restraint systems, seat backs and according recliner joints are also presented.

One particular embodiment according to the prior art can be found in GB 2,359,482. This document relates to a rearward tipping seat to prevent whiplash in collisions. In case of an impact the seat is tipping backwards to allow a rotational movement of the seat back to reduce the distance between the head of

a person sitting in the seat to the seat back over a longer distance and time. However, the tipping movement is a disadvantage, because the feet might loose contact with the pedals. Thus the driver might loose control over the vehicle. The head restraint rotates far backwards and therefore reduces the space available for backseat passengers. The same holds true for the overall backwards movement of the seat base. Furthermore, the seat can no longer be adjusted properly after impact, i.e. the seat base is permanently rotated. Depending on the physique of the driver, driving might be impossible with the seat completely out of position. The system might be released by the occupant himself/herself by pushing strongly into the seat (e.g. at an emergency breaking or when placing the feet on the dashboard). Likewise backseat passengers might pull on the seat back and thus release the system. In essence, the system can be released unintentionally.

A further device for avoiding whiplash injuries is known from Nilsson in US 2001/0011830 A1 equally using a tipping movement having the same disadvantageous as explained above. The device requires additional rollers. However, rollers are associated with friction and it can not be guaranteed that the rollers will reliably work after a long period of time when the device was not needed. The friction coefficient might have changed dramatically due to external influences (e.g. dust) and due to slight deformation of the seat structure in daily use. The device according to this document brings the seat in its final position and it can not be adjusted properly anymore. The horizontal distance needed for the backwards motion and rotation is quite large and this is especially crucial if the seat is initially already in the most backwards position as it will be the case with a tall driver.

Summary of the invention

The object of the invention is, inter alia, to provide an improved seat component to prevent whiplash injury.

The seat component to prevent whiplash injury according to the invention is characterized through the features of claim 1.

In order to prevent the relative acceleration of the head and the torso of an occupant sitting in a standard car seat during a rear-end impact, the device allows a translational motion of the seat base relative to the car while damping this motion. The device is mounted between the seat base and the car floor and can therefore be considered as an integral part of the seat.

It consists of an damping mechanism which is triggered by a sensor. The sensor is meant to detect the acceleration and when a certain limit is extended the damping device is released. Additionally, the damping device requires a tripping energy threshold to be extended in order to actively reduce the loading of the occupant. Thus, as a measure to prevent unintended activation, the system needs a certain acceleration followed by an impact force.

Once the system is activated, the seat is allowed to move backwards in a pure translational manner while the motion is damped.

The seat component to prevent whiplash injury according to the invention comprises a number of advantages:

- pure translational backwards motion, hence no rotation of the seat base and feet and knees are not lifted, i.e. contact to the pedals (for driver) is preserved. Additionally the pure translational backwards motion also ensures that the head restraint does not, as in a rotational motion, move away from the

head.

- damping elements on both sides of the slide ensure a symmetrical behavior, i.e. symmetrical loading of the occupant.
- the seat can be adjusted translationally after impact by means of the normal adjustment which is not damaged during the impact.
- the seat remains stable after impact due to the fact that the deformable elements are deformed plastically, i.e. the seat is not loose or bouncing.
- the vehicle can still be driven after impact, immediate visit of a service station is not mandatory although recommended.
- low repair costs, because only the deformable elements have to be replaced.
- the device consists of a trigger system for acceleration and threshold force requirement for damping, i.e. misuse is prevented. Applying force but no acceleration (e.g. pushing into the seat) or applying acceleration but no force will not lead to a release of the system.
- only a small distance is needed for effective backwards movement (approx. 40 mm). Hence after impact there is enough space for backseat passengers preserved even in the case that a tall driver uses the most backward position of the seat.

Further preferred embodiments are disclosed in the dependent claims.

Short description of the drawings

The invention will be explained in greater detail by reference to an exemplary embodiment of the invention shown in figures. Here:

Fig. 1 shows a diagrammatic view of a seat with a seat component in accordance with the invention mounted in a vehicle in

its initial position

- Fig. 2 shows a diagrammatic view of the seat of Fig. 1 in its final position after an impact,
- Fig. 3 shows a perspective view from below of the seat component according to one embodiment of the invention,
- Fig. 4 shows the perspective view of Fig. 3 in another angle and a trigger-system without cover,
- Fig. 5 shows a first embodiment of a deformable element in its initial position,
- Fig. 6 shows the deformable element of Fig. 5 in its final position after having absorbed impact energy,
- Fig. 7 shows a second embodiment of a deformable element in its initial position,
- Fig. 8 shows the deformable element of Fig. 7 in its final position after having absorbed impact energy,
- Fig. 9 shows a diagram of the NIC (neck injury criterion) according to sled tests experiments,
- Fig. 10 shows a diagram of the deformation of the deformable element according to said experiments, and
- Fig. 11 shows a diagram of the acceleration of the pelvis of a dummy according to said experiments.

Detailed description of an embodiment of the invention

Fig. 1 shows a diagrammatic view of a seat 1 in accordance with the invention mounted in a vehicle 2 in its initial position. The seat 1 of the vehicle 2 is mounted to a seat slide 3 which itself is mounted on a rail 4 of the car body 5.

Fig. 2 shows a diagrammatic view of the seat 1 of Fig. 1 after an impact, i.e. in its final position. In case of a rear-end impact, a trigger system which is shown in Fig. 3, releases the seat slide 3 which then enables the seat 1 to move backwards in direction of the arrow 6 (relatively to the vehicle 2) while

damping this translational movement.

Fig. 3 shows a perspective view from below of the seat component 10 according to one embodiment of the invention. The seat component 10 is mounted below the seat. The traverses 11 are fixed to the seat itself at different points 12. The traverses 11 may also be part of the seat itself. To ensure that the seat slide 3 moves symmetrical, the seat component 10 is attached to both sides of the seat slide 3. In the embodiment as shown in Fig. 3 both sides of the seat slide 3 are connected by the traverses 11. These traverses 11 are also used to mount the trigger system 13.

This trigger system 13 transmits the enabling signal to the release mechanism 14. In the case of Fig. 3 and 4 a rod 15 communicates a mechanical signal to the release mechanism 14. In other embodiments this signal may be an electric signal and the release mechanism 14 is triggered electrically.

Furthermore the trigger system 13 may comprise a system that receives the trigger signal either from an external sensor (e.g. a sensor used in other devices like, for instance, an airbag) or it generates the signal itself utilizing an accelerometer.

The release mechanism 14 in turn frees the slide 16 which upon the impact thus moves backwards. To damp this translational movement the embodiment according to the Fig. 3 and 4 incorporates a deformable element 17 on each side which can deform plastically. The deformable element 17 is mounted pivotally around pins 18. In other embodiments the deformable element 17 may be fixed to the slide 16 and the traverse 11. However, it is preferred to provide an easy replaceable deformable element 17.

Fig. 4 shows the perspective view of Fig. 3 in another angle and a trigger-system 13 without cover. A mass 19 is provided on a shaft 20 allowing a translational movement of the mass 19 freeing the engagement element 21 of the rod 15 and thus releasing the deformable element 17. Within this mechanical trigger system a mass-spring-system is used to detect the acceleration level. If the system is accelerated, the mass 19 moves backwards. This motion is transmitted to the release mechanism 14 which then enables the functioning of the device.

Fig. 4 shows the slide 16 which can move in the direction of the arrow 22. This movement deforms the deformable element 17 being pivotally attached with pins 18 with the slide 16 and the traverse parts 23. The deformable element 17 represents the damping component.

Fig. 5 shows a first embodiment of a deformable element 17 in its initial position, whereas Fig. 6 shows the same deformable element 17 in its final position after having absorbed impact energy. Fig. 7 shows a second embodiment of a deformable element 27 in its initial position, whereas Fig. 8 shows the same deformable element 27 in its final position after having absorbed impact energy.

A constant force-deformation characteristic is aimed at for the deformable element 17. Preferably the element shows a small elastic range followed by a large plateau region until eventually a hardening effect is observed. The distance of the backwards movement which results from the deformation has to be as small as e.g. 40 Millimeters. Fig. 5 and 7 show two possible out of a multitude of possible element shapes:

Fig. 5 shows a undeformed U-shaped steel profile 17 and Fig. 6 shows the same profile 17 deformed, i.e. after impact.

Fig. 7 shows a undeformed V-shaped steel profile 27 and Fig. 8 shows the same profile 27 deformed, i.e. after impact.

Both embodiments (profiles 17 or 27) have a middle part 31 leading to free ends 29. At each of the free ends 29 one bolting point 28 is provided to fix the deformable elements to the seat 1 at the traverse element 23 and to the slide element 16.

The deformable steel elements 17 or 27 of Fig. 5 and 7 are U-shaped (semi-hollow) profiles of 5 Millimeter thickness. The long side of the part 31 of the profile 17 in Fig. 5 is approx. 8 centimeters whereas the free ends 29 have a length of approx. 4 centimeters. In case of the profile 27 the free ends 29 have a length of approx. 7 centimeters and the transitional rounded part comprises a width of approx. 4 centimeters. These measures are given for the embodiment shown. They have to be adapted if a different displacement is sought.

Beside said steel elements 17 and 27 other elements can be provided as damping component. It is important that these elements have a force-deformation characteristic which is responsible for changes of the acceleration sustained by the person in the seat 1. When using damping elements with other shapes, it has to be noted that these elements work together with the seat slide 16 which guarantees a displacement with only one degree of freedom. Furthermore energy absorber could also be used. Instead of a separate element, a deformable slide is equally conceivable.

Fig. 9 shows a diagram of the NIC (neck injury criterion) according to sled tests experiments and Fig. 10 shows a diagram of the deformation of the deformable element according to said experiments. The results were obtained from sled tests experiments performed according to the proposal for ISO/TC22 N2071, ISO/TC22/SC10, collision test procedures, i.e. a crash pulse with

approx. $60 \text{ m}^2/\text{s}^2$ ($= 6 \text{ g}$) mean acceleration resulting in a velocity change (Δv) of 15 km/h was used. The person in the seat was a dummy of the BioRID type. Incorporating the device into the seat slide of a conventional state-of-the-art vehicle seat clearly demonstrated the benefits of the new device. According injury criteria like the neck injury criteria (NIC) were reduced by approx. 40% for the new seat slide compared to the standard seat not equipped with the device according to the invention. To achieve such improvement a backwards movement of 40 mm proved to be sufficient as can be seen from Fig. 10.

The device according to the invention was incorporated into a standard car seat having a mechanical sensor as shown in Fig. 3 and 4. A spring-mass system 13, 19, 20, 21 was used to detect the acceleration necessary to activate the system. If the acceleration threshold is reached the system is released through elements 14 and 15, i.e. a translational motion of the seat 1 relative to the vehicle floor is allowed. In such a case the seat 1 slides along a defined path as a gliding part and is guided along a slide. However, the energy absorbing unit 17, 27 which ensures a constant force restriction is mounted in parallel with the gliding part such that energy must be dissipated in order to allow movement. The energy absorption is performed by deformation of a steel profile 17 or 27, e.g. as shown in Fig. 5 and 7, respectively. It has to be noted that due to the profile used, a certain elastic force limit must be exceeded to start the energy absorption.

The results show that - upon acceleration of the slide - the dummy moves in direction of the back seat until the movement of the seat slide 16 was triggered. After the end of the movement of the seat slide 16 the head of the dummy comes into contact of the head restraint. The seat back rotates in a backward direc-

tion.

In order to avoid whiplash injuries the relative motion between head and neck has to be minimized. The neck injury criterion (NIC) takes into account the relative acceleration of head and body. The experiments show that the maximum value of the NIC was reduced from 13.4 m2/s2 (original seat) to 8.1 m2/s2 (a seat of the type of the first experiment with the seat components according to the invention). This is a reduction by about 40%.

Fig. 11 shows a diagram of the acceleration of the pelvis of a dummy according to said experiments. It can be seen from said acceleration of the pelvis that the value of the acceleration can be maintained on a plateau of about 3g during the deformation period of the element 17, 27. The deferment of the pelvis acceleration the acceleration of the thorax is also changed and this reduces the relative acceleration between head and neck, finally resulting in a smaller NIC value.

Alternative embodiments are conceivable, especially it is possible to provide additionally a pivoting movement of the seat at the end of the movement although this is not preferred as explained above.

Claims

1. A seat component to prevent whiplash injury during a rapid motion change of a vehicle comprising
 - means allowing a displacement of the seat (1) and a person sitting thereon backwards (6) in relation to the direction of movement at the motion change,wherein the seat component (10) is characterized in that said means comprise
 - a body (11, 18) to be affixed to or being part of the seat (1),
 - a slide element (16) affixed to the vehicle (2, 5) and being in guiding contact with said body (11, 18) to guide a translational displacement (6) of the seat (1) over a predetermined distance, and further comprise
 - a trigger system (13) to detect a acceleration threshold,
 - a release mechanism (14) controlled through the trigger system (13) to enable said translational displacement (6),
 - a damping component (17, 27) to damp said translational displacement (6),wherein the trigger system (13) opens the release mechanism (14) upon detection of an acceleration value above a predetermined threshold.
2. The seat component according to claim 1, wherein the trigger system (13) is mounted with the body (11, 18) to detect a acceleration threshold and comprises a mass-spring system.
3. The seat component according to claim 1, wherein the trigger system (13) comprises an accelerometer.
4. The seat component according to claim 1, wherein the trigger

system (13) uses an acceleration signal from an external accelerometer.

5. The seat component according to one of claims 1 to 4, wherein the release mechanism (14) comprises a mechanical stop or lever.

6. The seat component according to one of claims 1 to 5, wherein the damping component (17, 27) is a metal profile with two free ends (29) which are attached to the body (11, 18) and the slide element (16).

7. The seat component according to claim 6, wherein the free ends (29) are pivotally mounted to the body (11, 18) and the slide element (16) through pins (28).

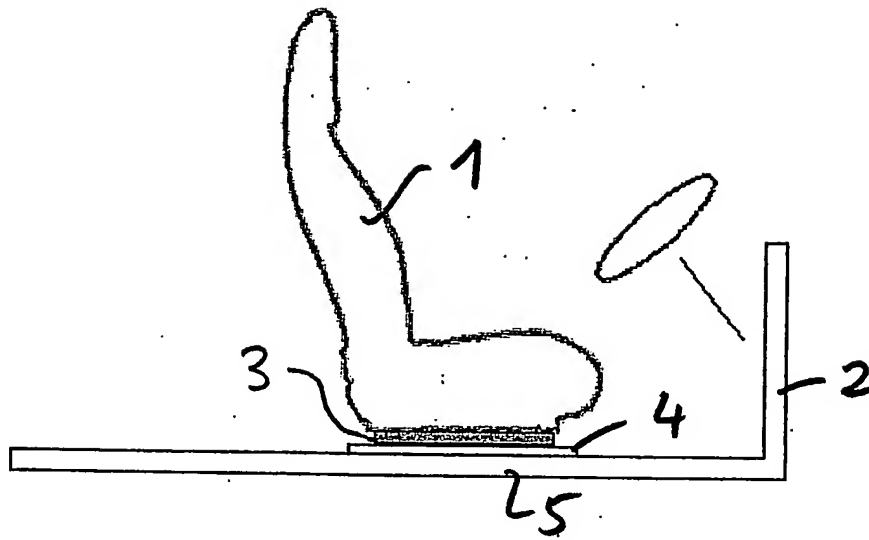


Fig. 1

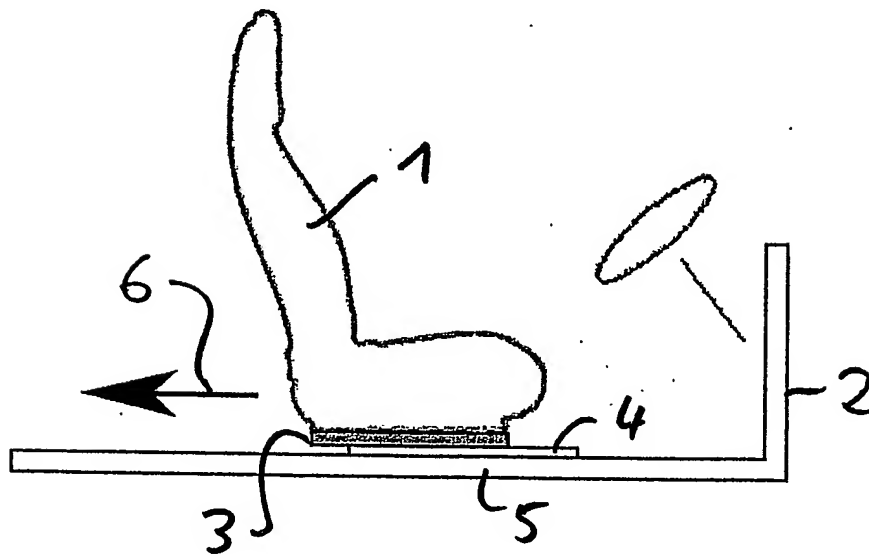
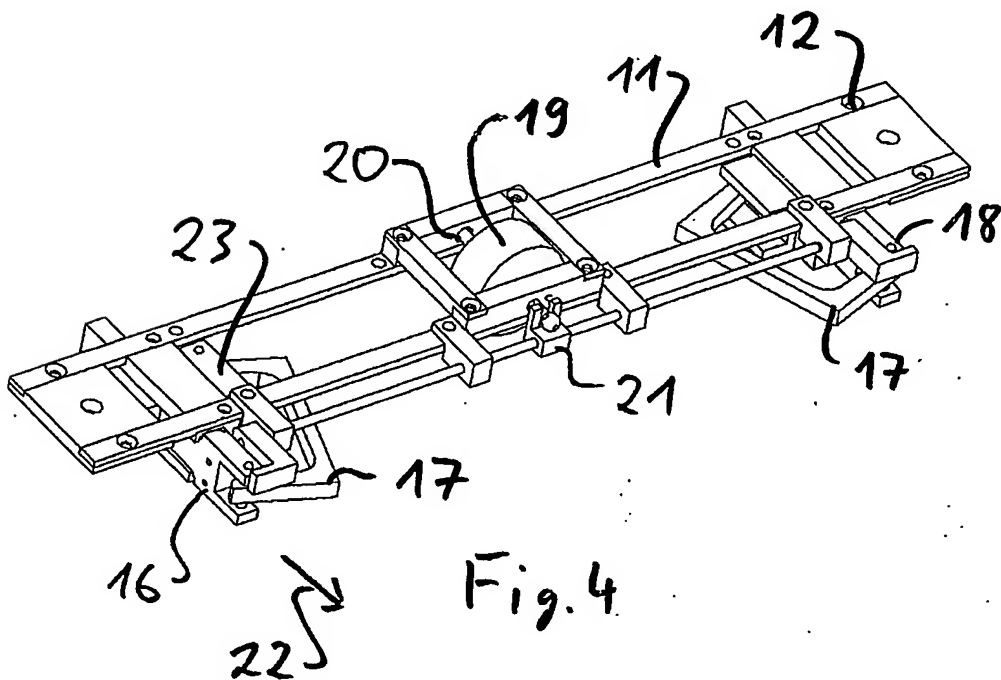
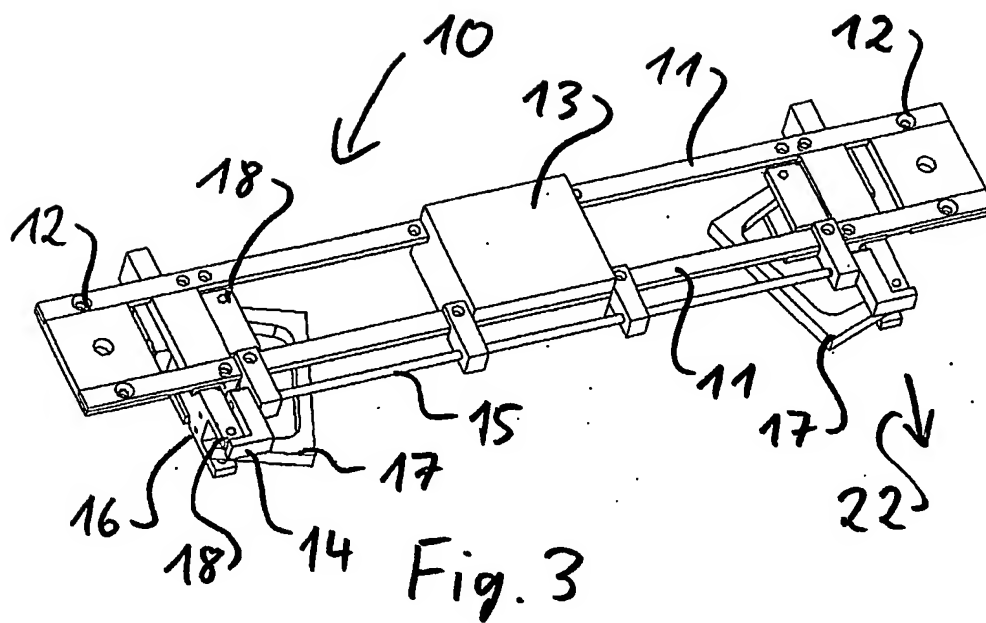


Fig. 2



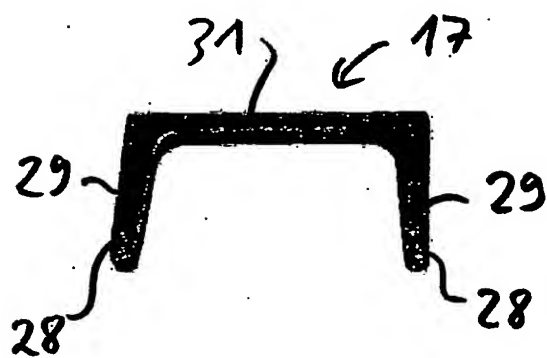


Fig. 5

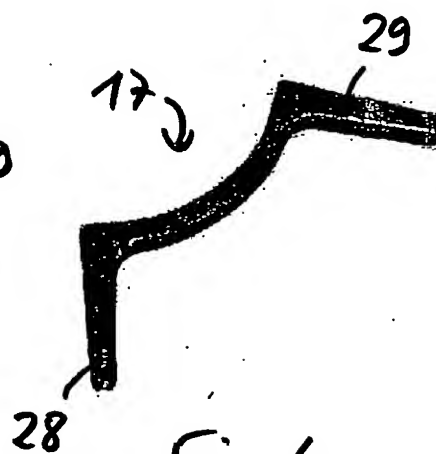


Fig. 6

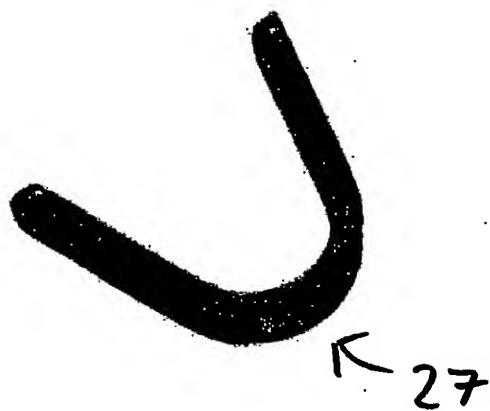


Fig. 7

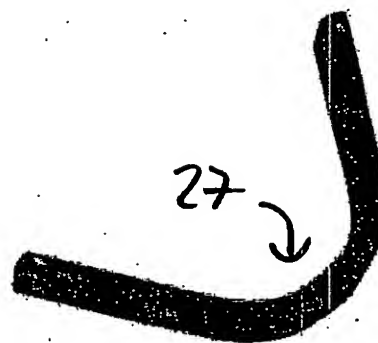


Fig. 8

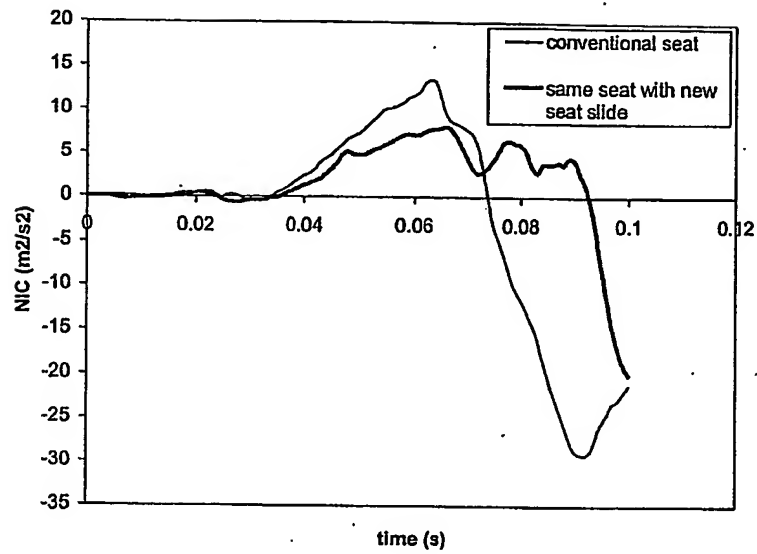


Fig. 9

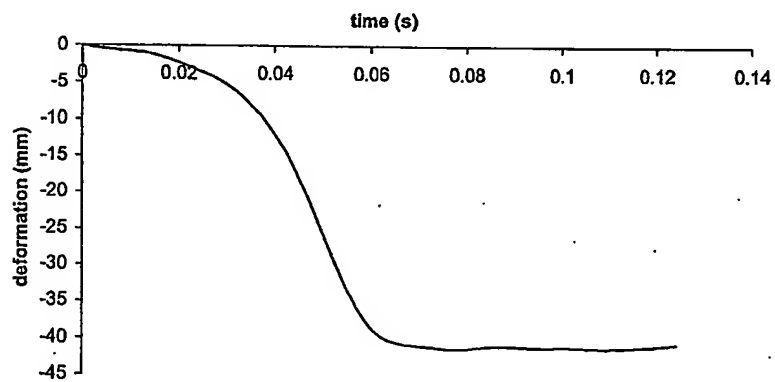


Fig. 10

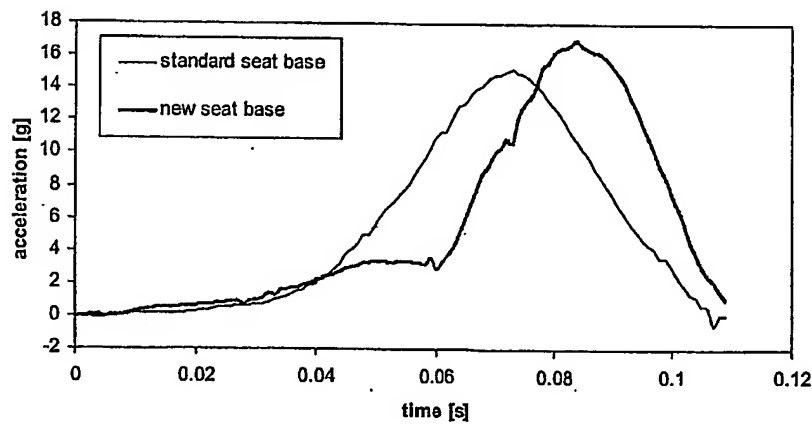


Fig. 11

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/06615

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B60N2/42 B60N2/427

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 227 563 B1 (TALISMAN RUEBEN) 8 May 2001 (2001-05-08)	1
Y	column 3, line 40 -column 7, line 20; figures 1-8	2-6
Y	US 5 947 543 A (HUBBARD LEO JAMES) 7 September 1999 (1999-09-07)	2-4
A	abstract; figures 1-10	1
Y	US 3 582 133 A (DELAVERNE HUBERT Y) 1 June 1971 (1971-06-01)	5,6
A	abstract; figures 1-6	1
X	US 5 314 206 A (VOLLMER ELMAR) 24 May 1994 (1994-05-24)	1,5
	column 3, line 34 -column 4, line 33; figures 1-3	
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

9 October 2003

Date of mailing of the international search report

17/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Gatti, C

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/06615

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2001/011830 A1 (NILSSON KENT) 9 August 2001 (2001-08-09) cited in the application	1,3
A	abstract; figures 1-19	4
X	DE 42 33 155 A (MUELLER FRANZ DIPL ING FH) 14 April 1994 (1994-04-14)	1
	abstract; figures 1-5	
X	US 5 022 707 A (MEADE ALBERT J ET AL) 11 June 1991 (1991-06-11)	1
	abstract; figures 25,27,28,30	
A	US 5 746 467 A (JESADANONT MONGKOL) 5 May 1998 (1998-05-05)	1,5,6
	abstract; figures 1-5	
A	GB 1 271 108 A (KLIPPAN) 19 April 1972 (1972-04-19)	1,6
	the whole document	
A	GB 1 391 644 A (HERZER K HERTZER KURT) 23 April 1975 (1975-04-23)	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/06615

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6227563	B1	08-05-2001	NONE
US 5947543	A	07-09-1999	US 6092853 A 25-07-2000
US 3582133	A	01-06-1971	FR 1543275 A 25-10-1968 DE 1780008 A1 02-03-1972 GB 1228657 A 15-04-1971 FR 93128 E 14-02-1969 FR 94274 E 25-07-1969
US 5314206	A	24-05-1994	DE 4032386 A1 16-04-1992 DE 59103930 D1 26-01-1995 WO 9206866 A1 30-04-1992 EP 0551279 A1 21-07-1993 ES 2068597 T3 16-04-1995 JP 2894833 B2 24-05-1999 JP 6500282 T 13-01-1994
US 2001011830	A1	09-08-2001	AU 6428998 A 29-09-1998 EP 0966365 A1 29-12-1999 WO 9840238 A1 17-09-1998 US 6435591 B1 20-08-2002
DE 4233155	A	14-04-1994	DE 4233155 A1 14-04-1994
US 5022707	A	11-06-1991	CA 1299987 C 05-05-1992 DE 3853149 D1 30-03-1995 DE 3853149 T2 19-10-1995 EP 0323758 A2 12-07-1989 JP 2169343 A 29-06-1990 US 5449218 A 12-09-1995 KR 125572 B1 01-07-1998
US 5746467	A	05-05-1998	US 5810417 A 22-09-1998 DE 69616229 D1 29-11-2001 EP 0769414 A2 23-04-1997 JP 9118164 A 06-05-1997
GB 1271108	A	19-04-1972	DE 1755660 A1 02-03-1972 FR 2010236 A5 13-02-1970 NL 6907050 A 09-12-1969
GB 1391644	A	23-04-1975	NONE